



HAL
open science

Numerical study of heat and mass transfer during contact heating of potato slices

T Vine, D. Flick, B. Broyart

► **To cite this version:**

T Vine, D. Flick, B. Broyart. Numerical study of heat and mass transfer during contact heating of potato slices. COMSOL Conference 2019, Sep 2019, Cambridge, United Kingdom. hal-03640663

HAL Id: hal-03640663

<https://hal-agroparistech.archives-ouvertes.fr/hal-03640663>

Submitted on 26 Apr 2022

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Numerical study of heat and mass transfer during contact heating of potato slices

T. Vine, D. Flick, B. Broyart

UMR Ingénierie Procédés Aliments, AgroParisTech, INRA, Université Paris-Saclay, 91300, Massy, France

INTRODUCTION:

Studies concerning the contact heating of food products remain relatively rare in the literature despite the importance of this mode of heat transfer in many industrial and domestic operations such as grilling or pan-frying. In this work, a 2D mathematical model was developed and used to better understand heat and mass transfer during contact heating of a particular product, the potato.

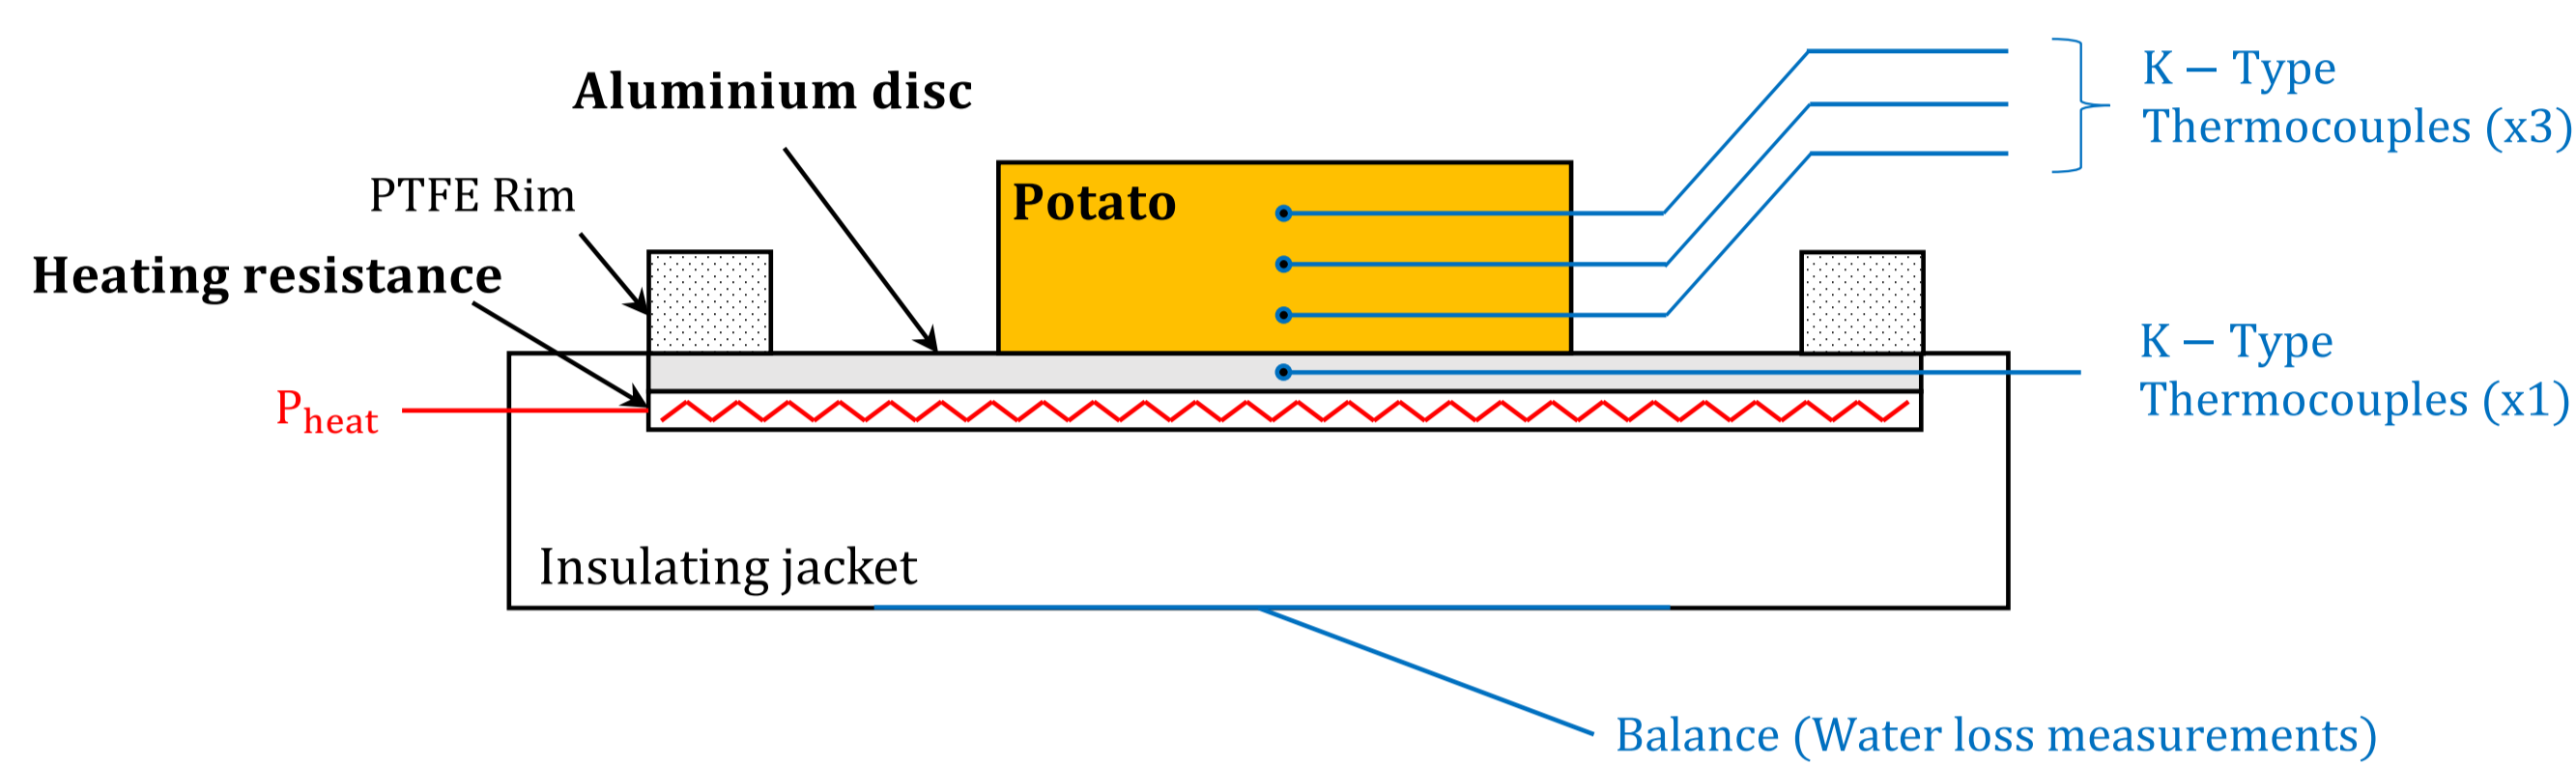


Figure 1. Experimental setup

GOVERNING EQUATIONS:

Given the high temperature of the heating surface, the formation and moving of a boiling front at the bottom surface of the product is assumed. This boiling front is described using a moving interface that divides the product in two regions: the moist region and the dry region (the crust).

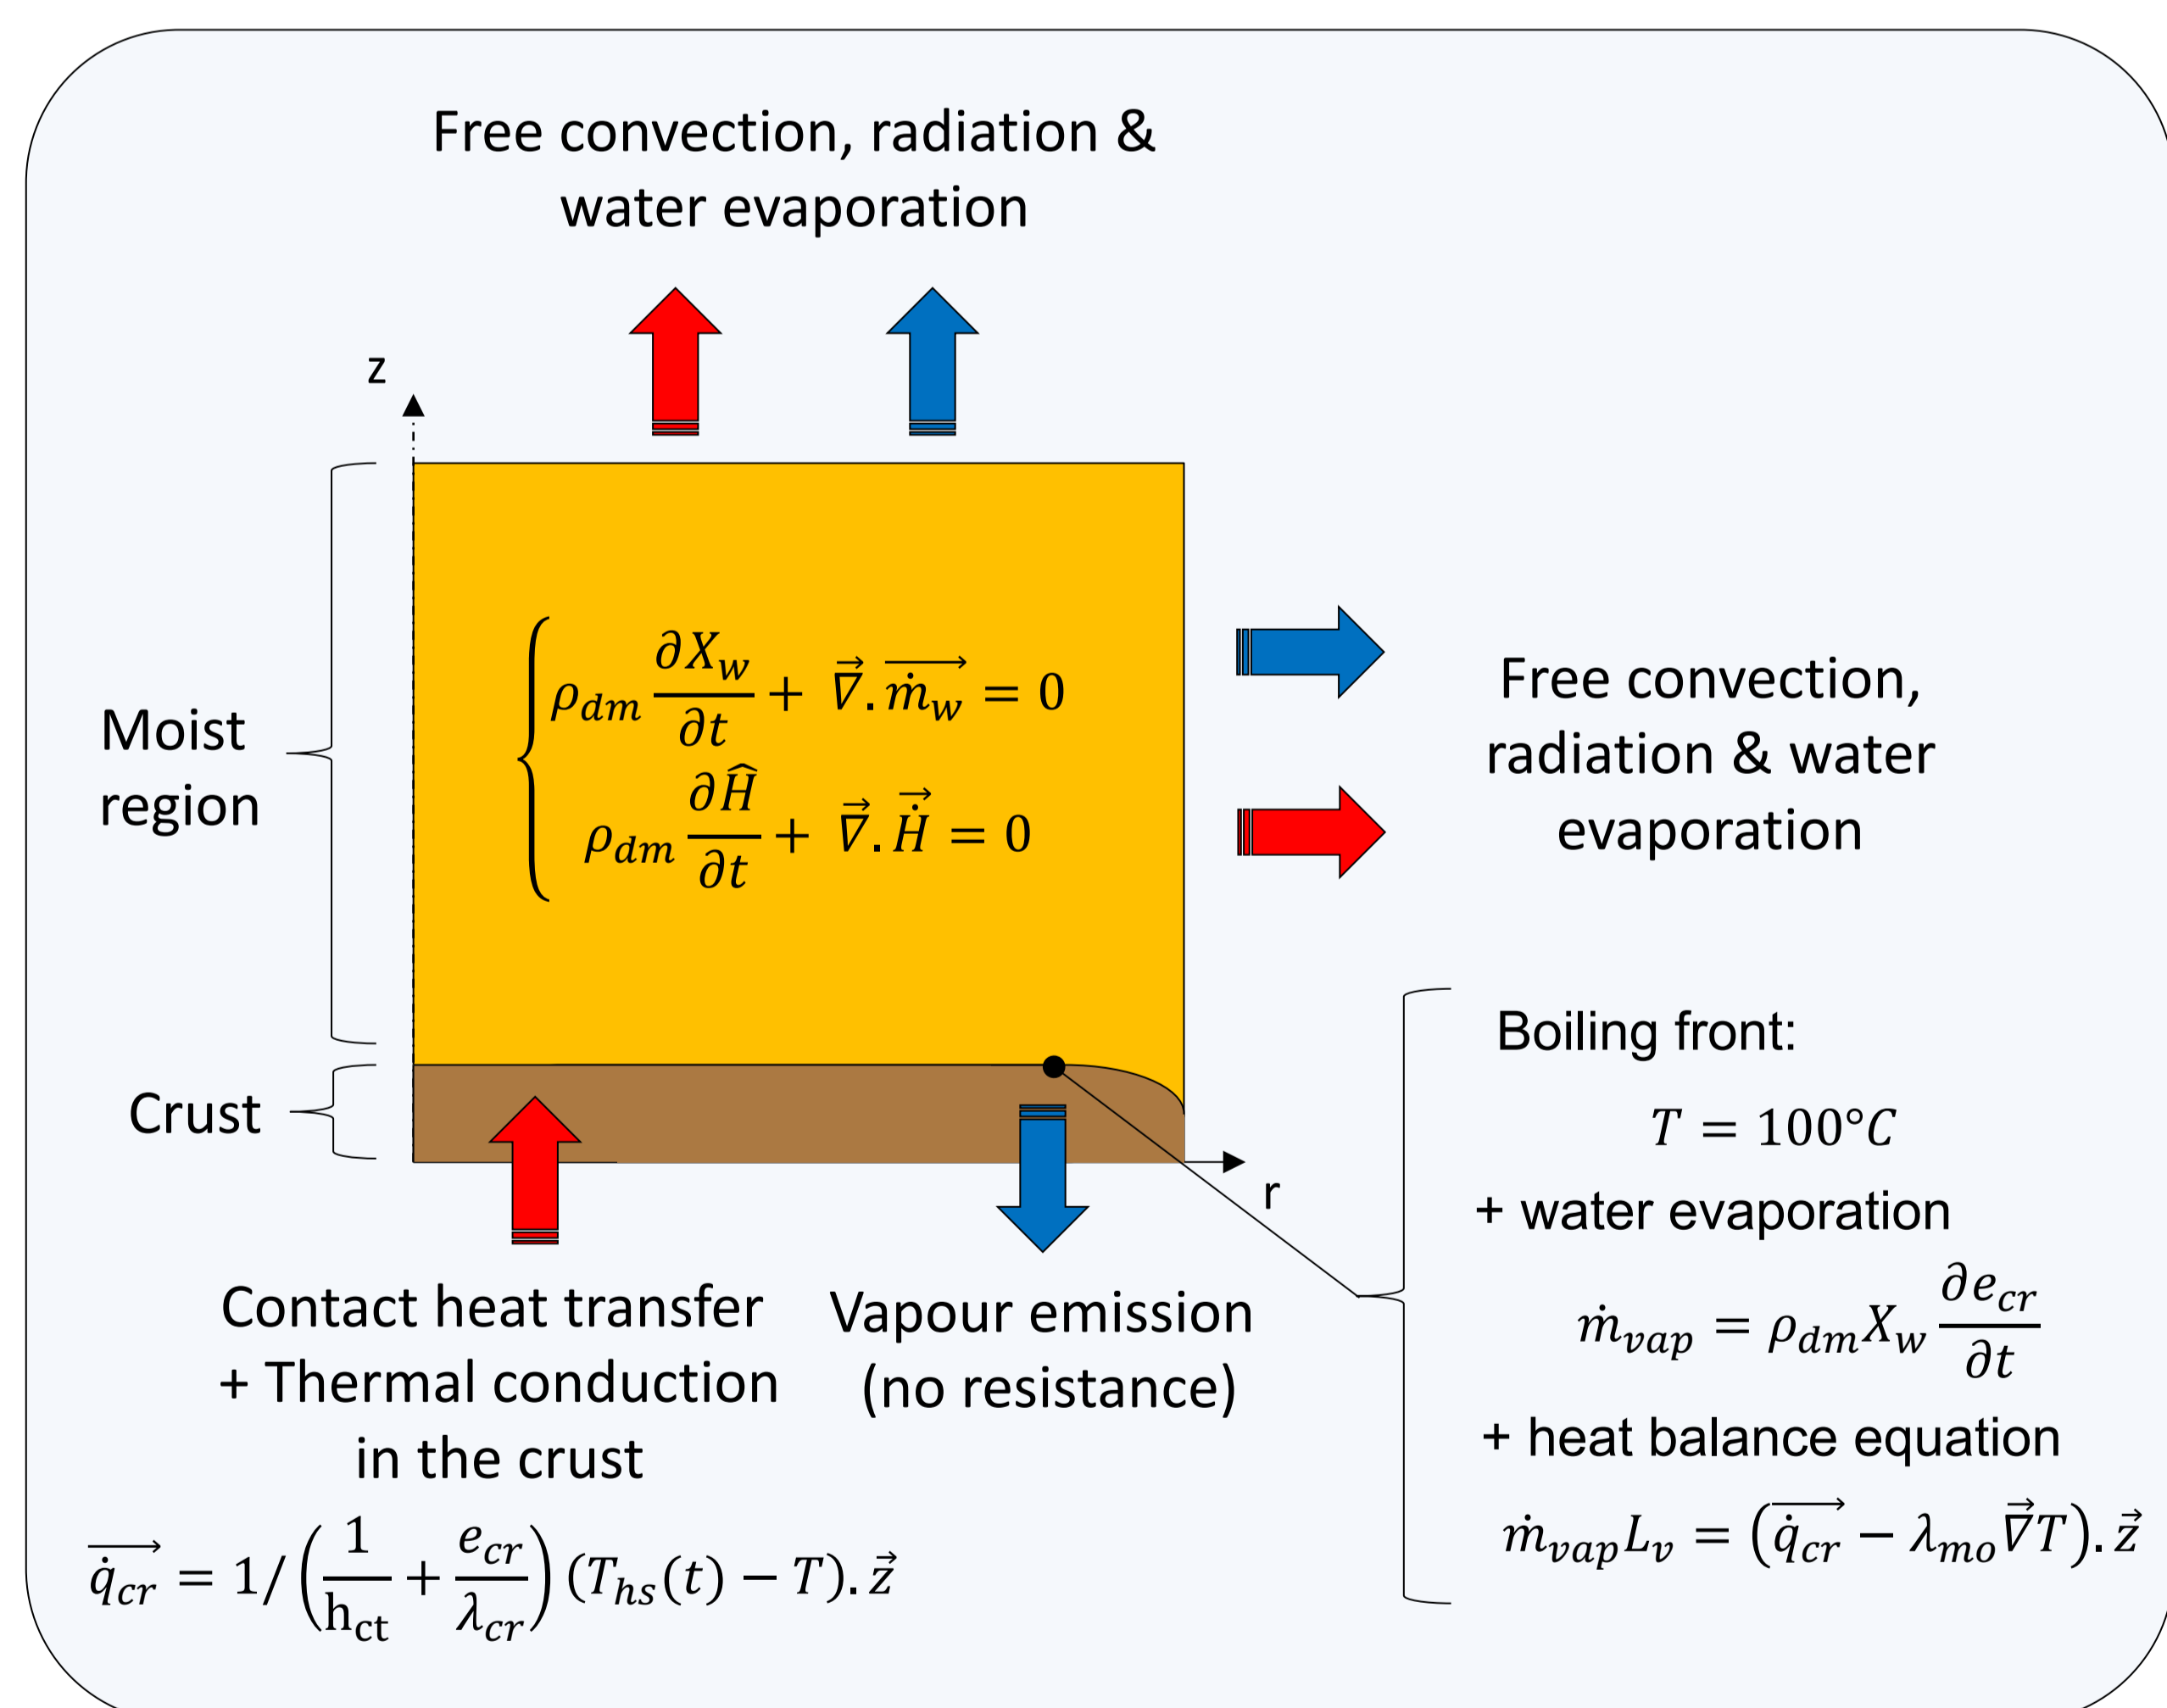


Figure 2. Governing equations

GEOMETRY & MODEL IMPLEMENTATION:

- COMSOL Multiphysics 5.2
- 2D axisymmetric geometry
- Coefficient Form PDE for the moist region
- Boundary ODE for the boiling front and the crust
- Deformed geometry for the moving interface
- Free triangular mesh (4268 elements)

RESULTS:

Simulated results are compared to experimental data obtained using the experimental device developed for this study. Results are shown for a constant heating power of $3.2 \text{ kW}\cdot\text{m}^{-2}$, $6.4 \text{ kW}\cdot\text{m}^{-2}$ and $9.6 \text{ kW}\cdot\text{m}^{-2}$ with and without the presence of an oil layer below the product.

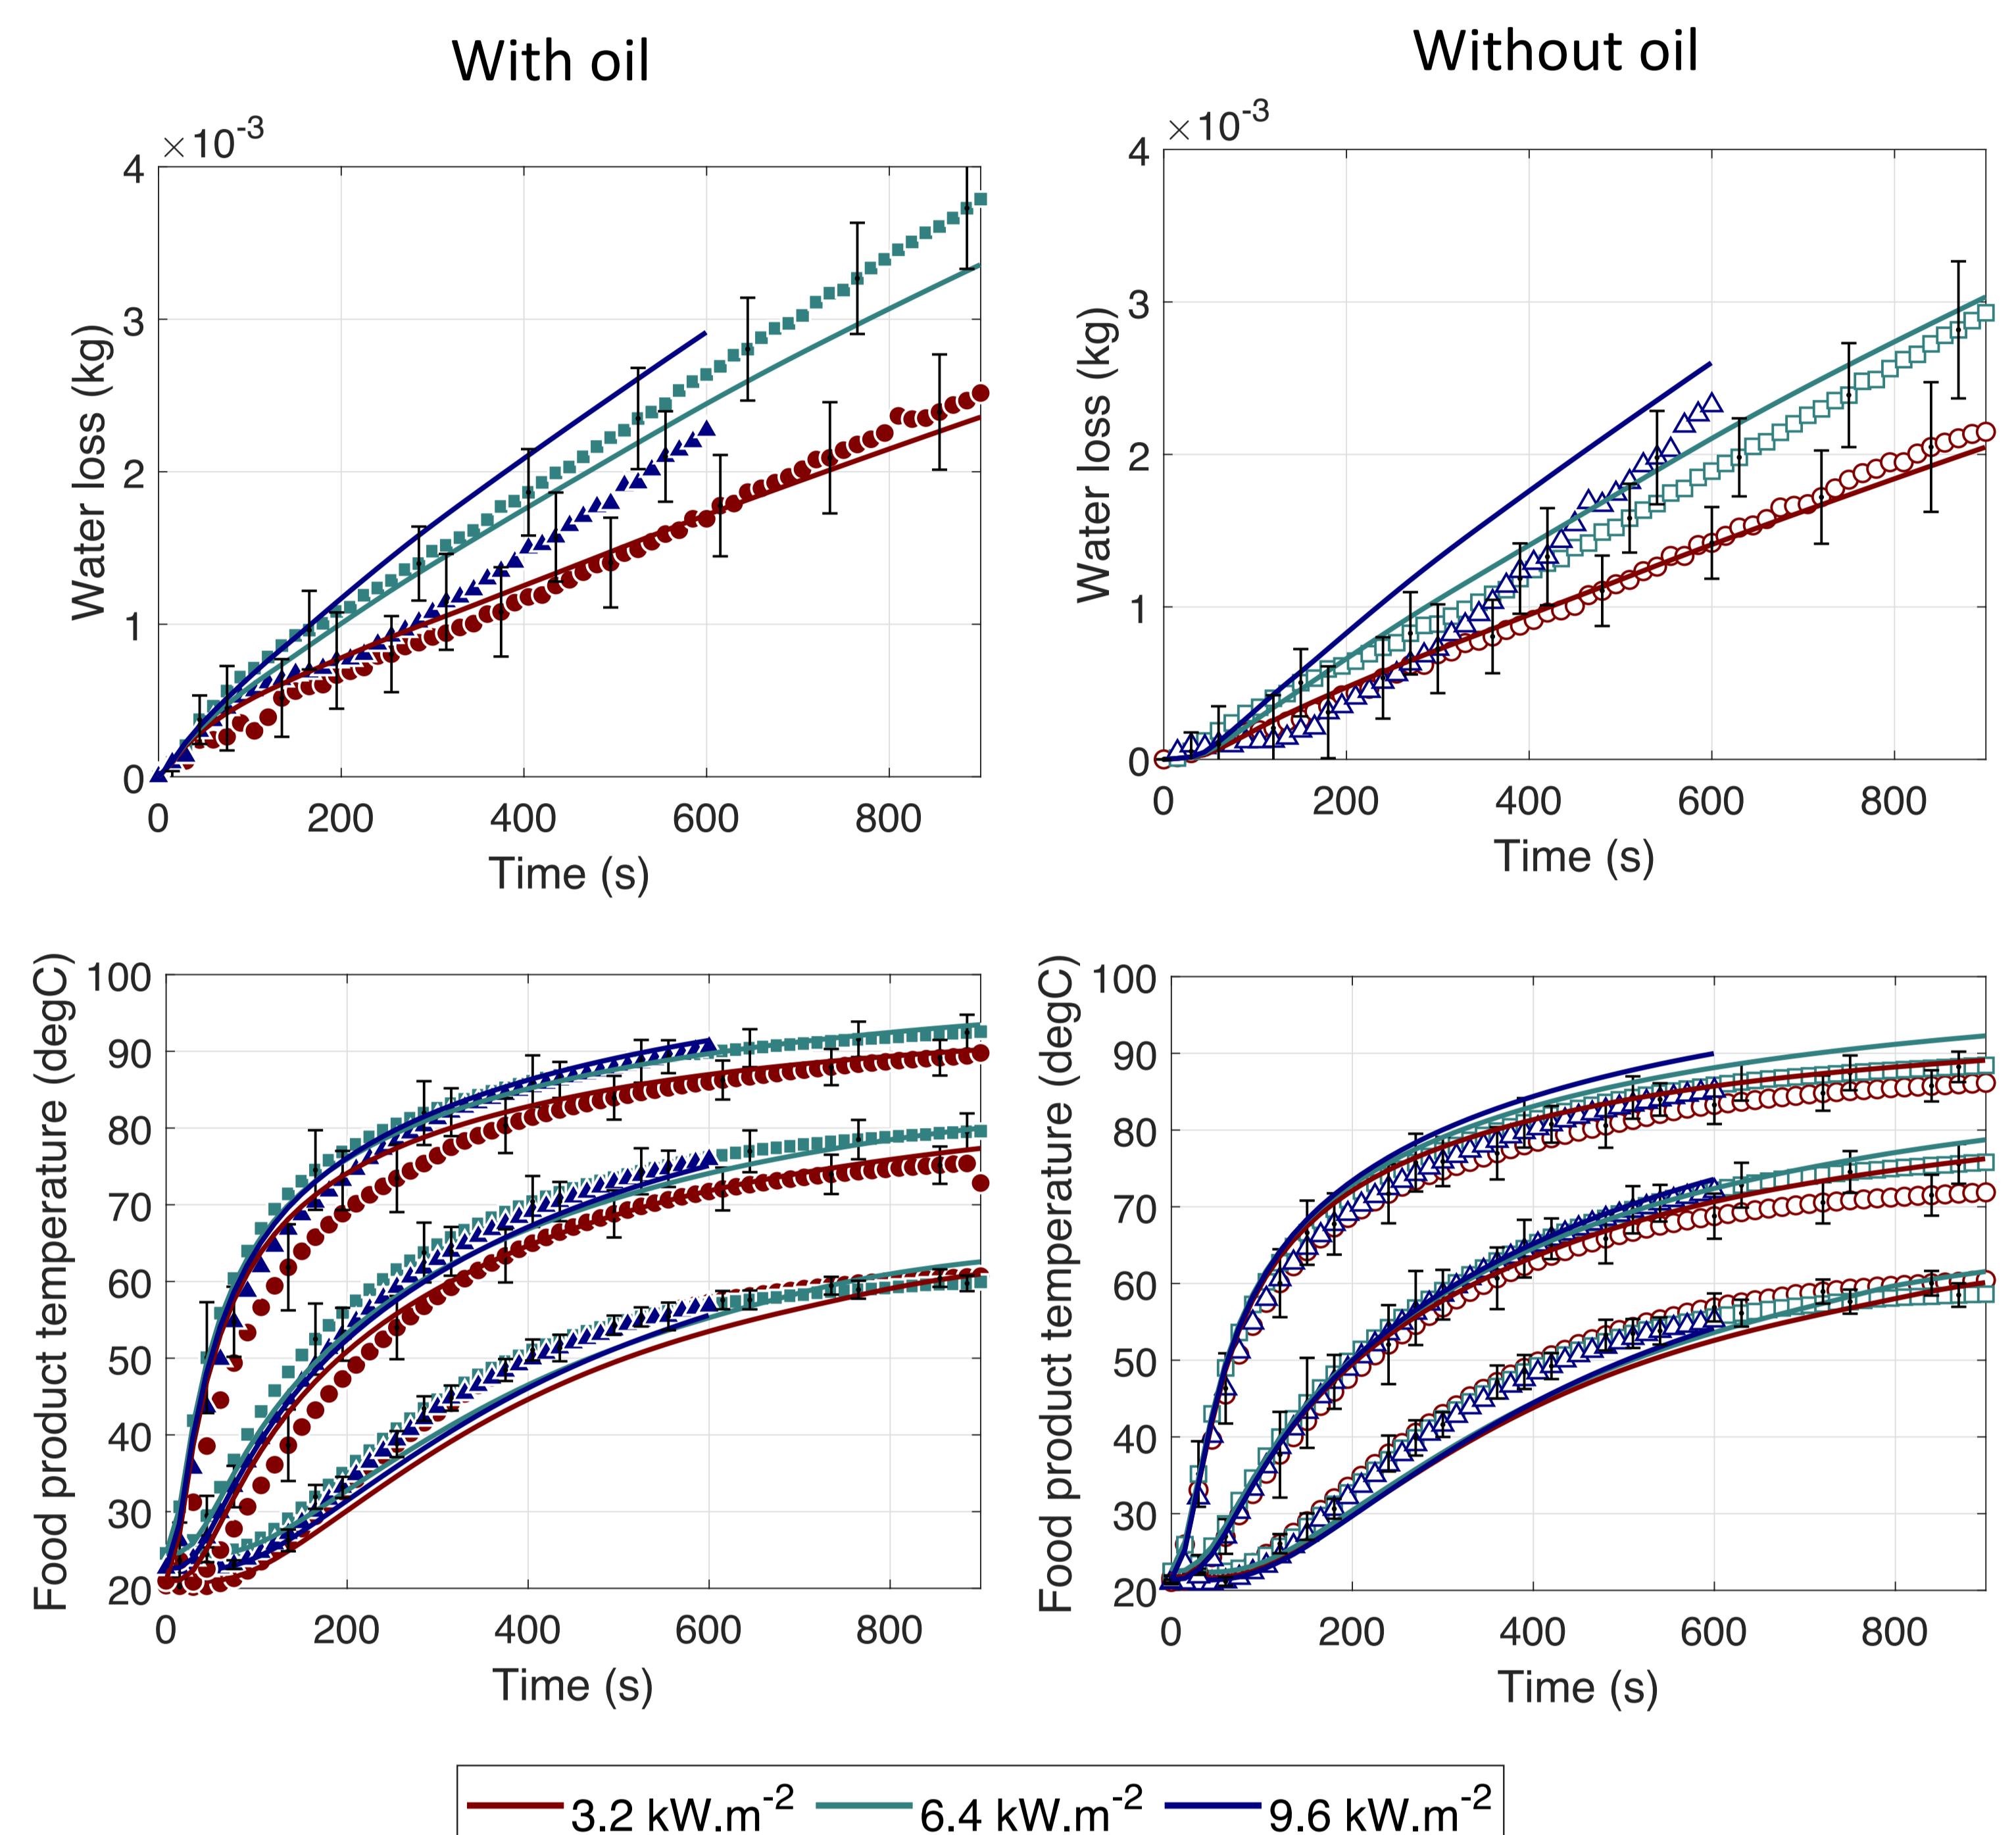


Figure 3. Simulated and experimental results. Temperature profiles at three locations in the product and water loss kinetics.

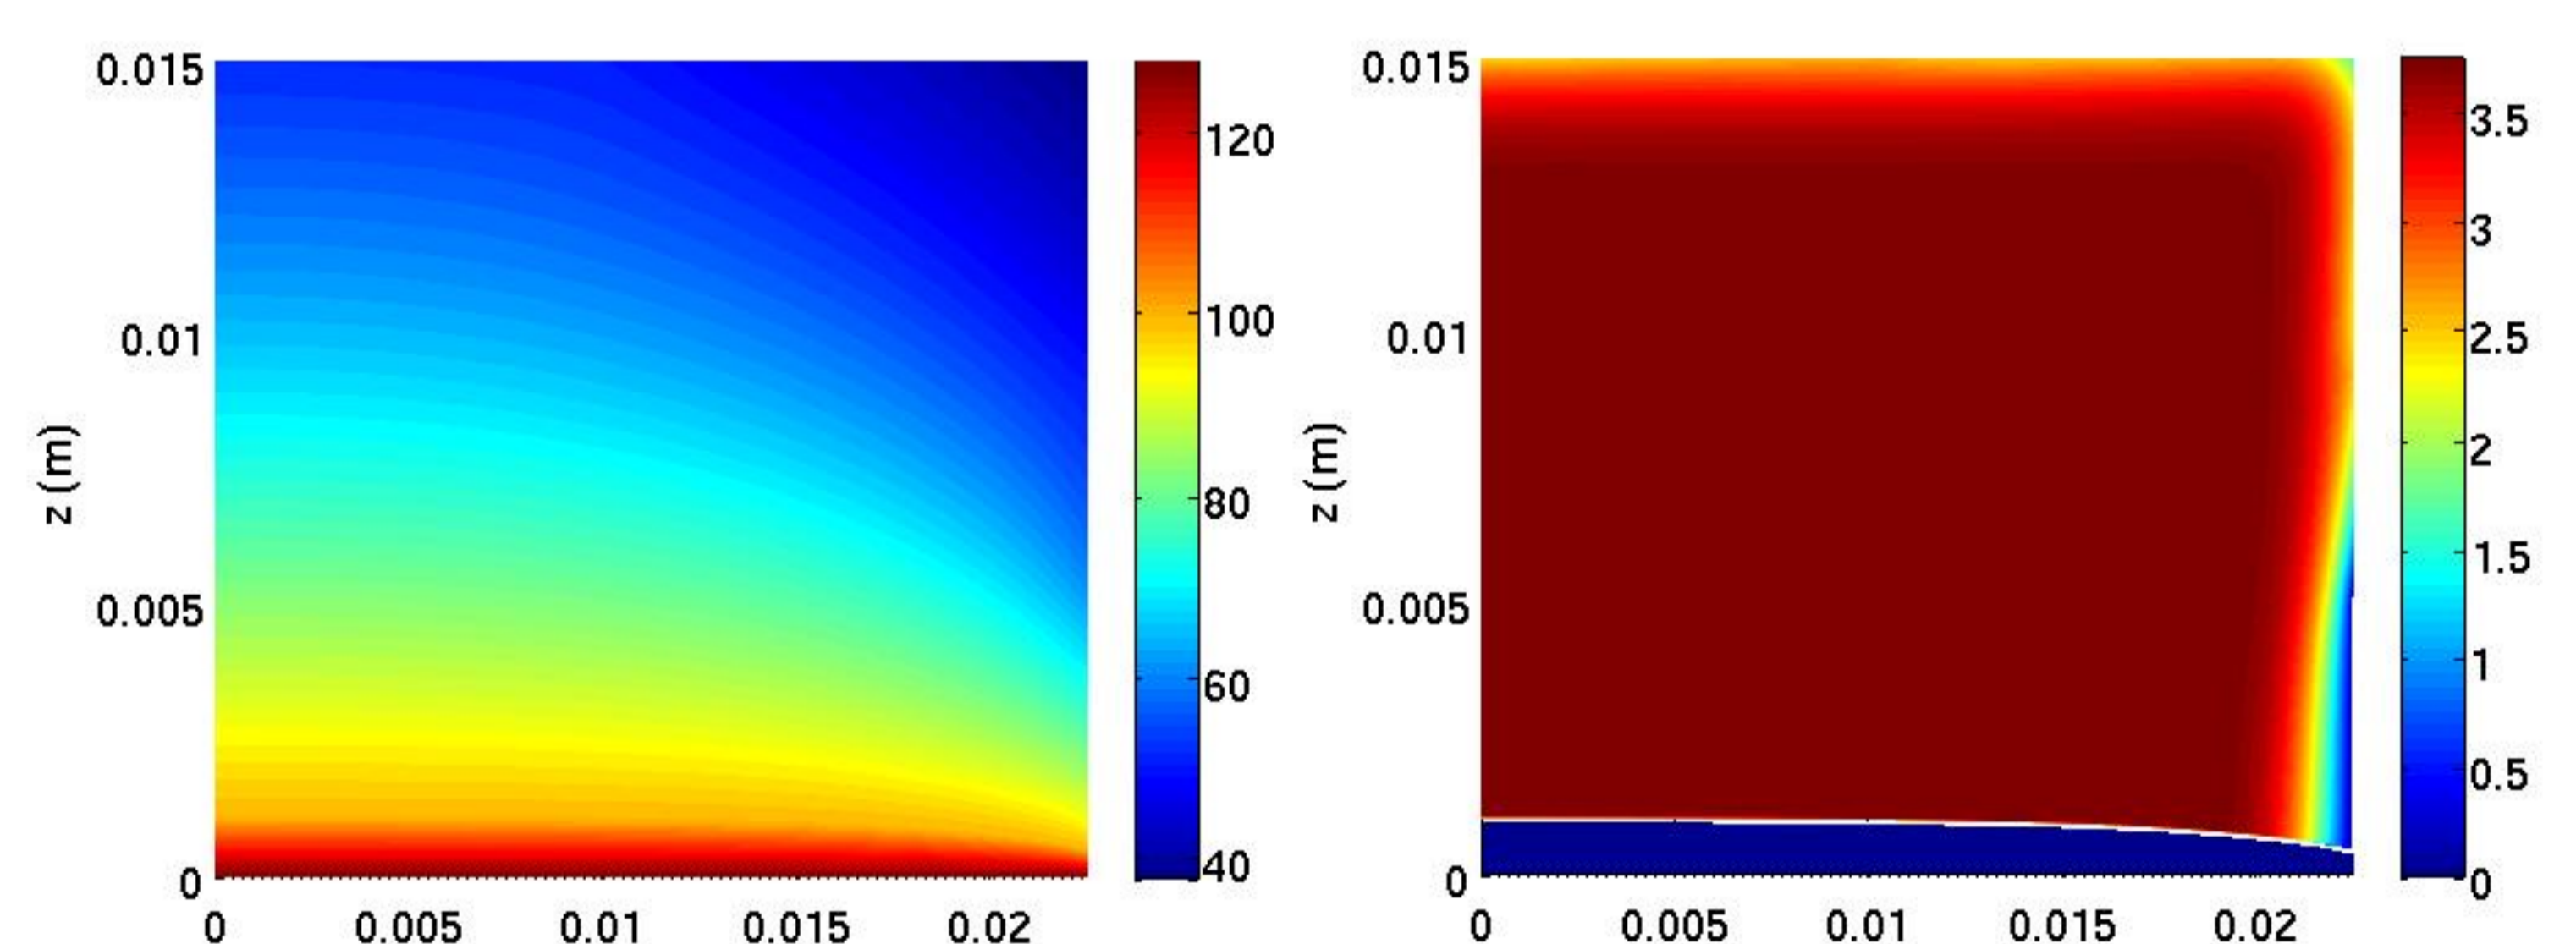


Figure 4. Example of simulation results. Temperature and water content field obtained after 15 min of heating ($3.2 \text{ kW}\cdot\text{m}^{-2}$ with oil).

CONCLUSIONS:

The model was validated by showing good agreements between measured and calculated values of product temperature and water loss. Experimental characterization of the structure of the crust (porosity, permeability) is planned to improve model accuracy (especially for high heating power).